


PERFORMANCE, FEATURES & BENEFITS

Long life expectancy, iGuard surface – easy cleaning and maintenance, Excellent abrasion and scuff resistance, Non-directional design in vogue colors, Anti-bacterial, Dimensionally stable

RECOMMENDED USAGE

Fitness halls | Stages | Exhibitions | Catwalks
Dance halls | Studios

CONSTRUCTION

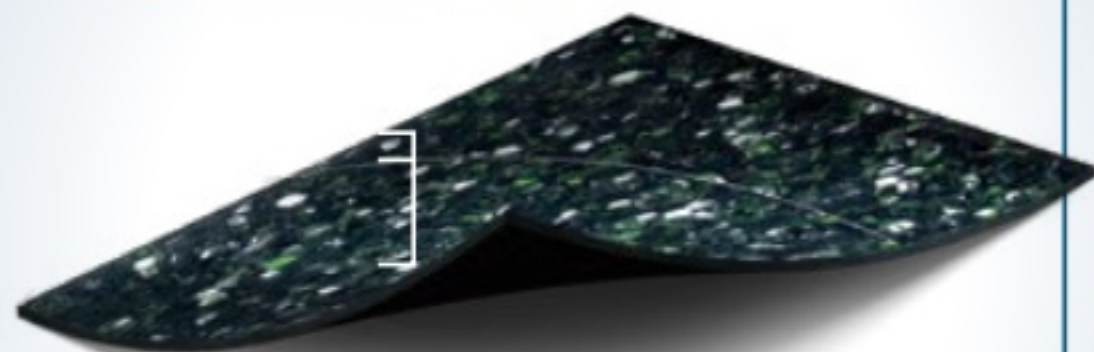

iGuard PUR Surface
Non-directional
homogeneous layer

DESCRIPTION

Construction		homogeneous
Binder content	EN ISO 10581	Type I.
Total thickness	EN ISO 24346	2.0 mm
Wear layer thickness	EN ISO 24340	2.0 mm
Width of roll	EN ISO 24341	2 m
Length of roll	EN ISO 24341	20 lm
Total weight	EN ISO 23997	2,8 kg/m ²

CLASSIFICATION

European classification	EN 685	class: 34/43
-------------------------	--------	--------------

PERFORMANCE

Abrasion group	EN 660-1	T
Residual indentation	EN ISO 24343	max. 0.1 mm
Dimensional stability	EN ISO 23999	max. 0.4 %
Fire resistance	EN 13501-1	class: Bfl-s1
Slip resistance	DIN 51130	R9
	EN 13893	class: DS
Electrical resistance	EN 1815	< 2 kV
Chemical resistance	EN ISO 26987	✓
Light fastness	EN 20105 B02	grade 6
Castor chair resistance	EN ISO 4918	✓
Hygiene		bacterial resistant
Seaming method		hot or cold welding
Warranty		10 year