


# ADEFIX® P5

## Glue 310 ml, 1 kg, 5 kg



ADEFIX® P5

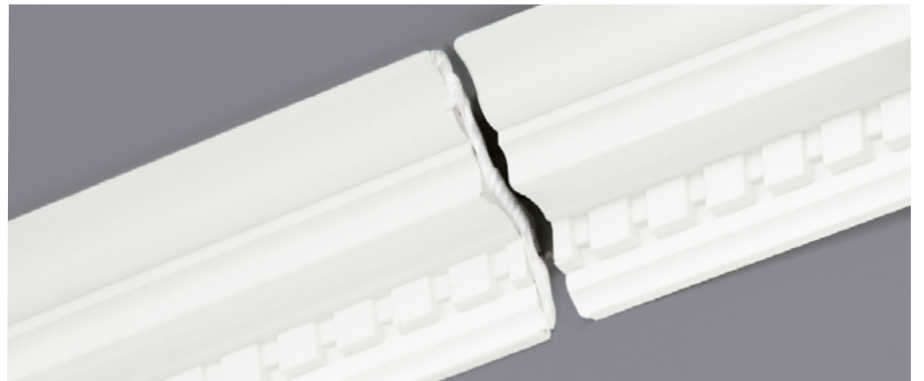

### 1. MATERIAL:

#### Product:

ADEFIX® P5 is an adhesive filler for fixing polystyrene, NOMASTYL®, and polyurethane, ARSTYL®, covings and ceiling medallions.

#### Technical properties:

Basic material	Plastic dispersions
Consistency	Paste
Polymerization	Physical polymerisation
Open processing	10-15 min.
Correctable up to (*)	5 min
Drying time	Approx. 24 hours
Density	1.81 g/ml
Temperature resistance (after hardening)	-20°C to +70°C

(\*) the indicated values can be modified by environmental conditions such as temperature, humidity, substrate nature, ...



### 2. SPECIFIC PROPERTIES

#### Characteristics:

- Solvent free
- Retains slight elasticity after drying
- Can be sanded
- Suitable for painting
- Not frost-resistant



*we will succeed together*

NMC sa reserves the right to update the product line or its technical features to the state-of-the-art technology anytime and without previous announcement. All given information is to the best of our knowledge. If you have any questions concerning technical details please contact the NMC sa information service. Any partial reproduction or reprint shall require our explicit approval.

**NMC sa**  
 Gert-Noël-Strasse – B-4731 Eynatten  
 ☎ +32 87 85 85 00 – 📠 +32 87 85 85 11  
 info@nmc.eu



# ADEFIX® P5

## Glue 310 ml, 1 kg, 5 kg



**ADEFIX® P5**

### 3. USE

#### Applications:

Sticking and pointing extruded or expanded polystyrene and polyurethane on walls and ceilings, in porous substrates.

#### Packaging:

Colour: white

Package size: Cartridge of 310 ml, buckets of 1 kg and 5 kg

#### Shelf-life:

Sealed packaging, in a cool, dry location, at temperatures of +10°C to +25°C. See date on packaging

#### Support:

Material: porous materials such as brick, concrete, plaster.  
The substrate must be clean, dry and free of dust or grease.

#### Application method:

- Apply with an applicator gun (cartridge) or spatula.  
Coat the gluing surfaces of the decorative elements.  
Then place the decorative element onto the substrate and press hard.
- Application temperature: +10°C to +30°C (ideal +15°C to +25°C)
- Cleaning: Water, only in fresh state.
- Width of joints: Between the individual profiles approx. 2-3 mm.

### 4. SPECIAL INSTRUCTIONS

#### Safety measures:

Follow the usual Occupational Health & Safety procedures.

Contains: 1,2-benzisothiazol-3(2H)-one; 2-methyl-2H-isothiazol-3-one.

May produce an allergic reaction.

See Safety Data Sheet.

#### Important note:

Physical properties of the products and the laying surfaces cause different natural expansion coefficients, and induce that the joint and the glue move or that (fine) hair cracks can be seen. This fact does not constitute grounds for complaint.